


# MARBLE & RESIN slabs

Polished or Honed  
non-rectified



\*\*305x125cm - 120<sup>5/64</sup>"x49<sup>7/32</sup>"

2cm or 3cm

\*\* available only in this colors  
(see color chart)

# MARBLE & RESIN tiles

Polished, Honed R9 or R10,  
rectified, non-beveled - 2mm grout joint



120x180cm - 47<sup>1/4</sup>"x70<sup>13/16</sup>"

2cm or 3cm



120x120cm - 47<sup>1/4</sup>"x 47<sup>1/4</sup>"

1.2cm or 2cm or 3cm



100x100cm - 39<sup>3/8</sup>"x 39<sup>3/8</sup>"

1.2cm or 2cm or 3cm



60x120cm - 23<sup>5/8</sup>"x47<sup>1/4</sup>"

1.2cm or 2cm or 3cm



60x60cm - 23<sup>5/8</sup>"x 23<sup>5/8</sup>"

1.2cm or 2cm



30x60cm - 11<sup>13/16</sup>"x23<sup>5/8</sup>"

1.2cm or 2cm



80x80cm - 31<sup>1/2</sup>"x 31<sup>1/2</sup>"

1.2cm or 2cm or 3cm




80x40cm - 31<sup>1/2</sup>"x 15<sup>1/2</sup>"

1.2cm or 2cm or 3cm

# MARBLE & RESIN shapes

Mesh Mounted Mosaic sheets  
2mm grout joint


Hexagone



30x30cm - 11<sup>13/16</sup>"x11<sup>13/16</sup>"

2cm


Brick



30x30cm - 11<sup>13/16</sup>"x11<sup>13/16</sup>"

2cm


Triangle



30x30cm - 11<sup>13/16</sup>"x11<sup>13/16</sup>"

2cm

Herringbone



30x30cm - 11<sup>13/16</sup>"x11<sup>13/16</sup>"

2cm

**Michael Montorsi**  
T: (630) 539 - 4470  
e-mail: [mmontorsi@M2itld.com](mailto:mmontorsi@M2itld.com)

TERRAZZO FIELD  
**NSTONE**


NSTONE SRL  
VIA CARRARESE, 9  
35028 PIOVE DI SACCO  
PADOVA ITALY  
VAT.ID 05342750287

VIA UGO BASSI, 60  
35131 PADOVA \_ ITALY

TERRAZZO FIELD  
NSTONE

## technical data sheet SCHEDA TECNICA

# 1621.16 FERRARA 00R

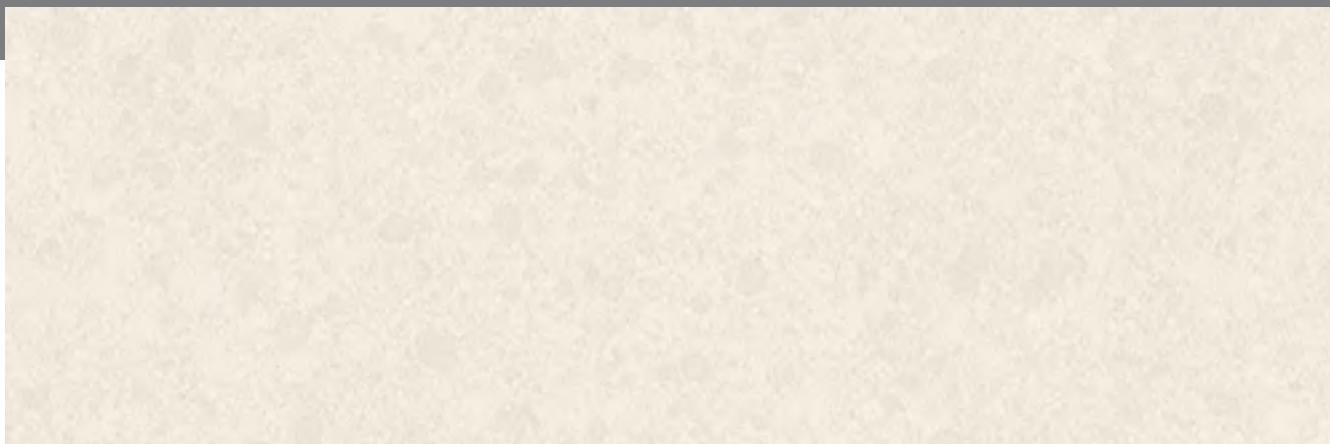

AGGLOMERATO MARMO RESINA

	RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE	EN 14617-1	MPA	> 20
	RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE	EN 14617-4	MM <sup>3</sup>	288 -481
	ASSORBIMENTO ACQUA WATER ABSORPTION	EN 114617-2	%	< 0,15 %
	COEFF. DI ATTRITO DINAMICO DYNAMIC COEFF. OF FRICTION	ANSI A.137.1:2012	ANSI A.137.1:2012	> 0,42 HONED 220
	RESISTENZA AL FUOCO FIRE RESISTANCE	EN 13501/1	A2 F2-S1	A2 F2-S1
	PESO SPECIFICO SPECIFIC WEIGHT			2,40 KG/M <sup>3</sup>
	RESISTENZA AL GELO FROST RESISTANCE	EN-14617/5	RESISTANT	RESISTANT